Gravity Separator GHTA




WORKING PRINCIPLES

Gravity Separator is used for separation of having same grain size and shape materials according to their specific gravity. It is used for separation, which can not be made by other machines. This machine can be used for separation and cleaning operations in flour, lentil and in all types of grain processing facilities.





Product Data Sheet

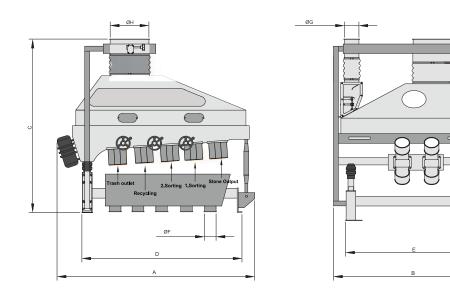

| Туре | Technical Features | | Dimensions(mm) | | | | | | | | | | |
|----------------|--------------------|-----------------|----------------------|------|------|------|------|------|-----|-----|-----|------|----------------|
| | Capacity (t/h) | Air (m³/min) | Motor | Α | В | С | D | Е | F | G | Н | 1 | Weight (kg) |
| GHTA 140 x 180 | 2-3 | 165 | 2 x 0.38 kw 1000 rpm | 1710 | 1680 | 1850 | 1690 | 1450 | 120 | 120 | 400 | - | 650 |
| GHTA 150 x 230 | 3-5 | 220 | 2 x 0.38 kw 1000 rpm | 2400 | 1885 | 1760 | 2120 | 1555 | 120 | 150 | 400 | 1200 | 880 |